



POLE LIGHT
STYLISH - STRONG - EFFICIENT

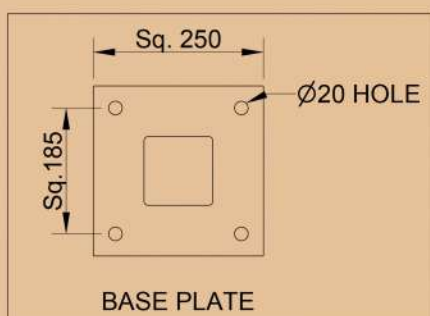

HL-ND-3461
(SINGLE ARM)5MTR

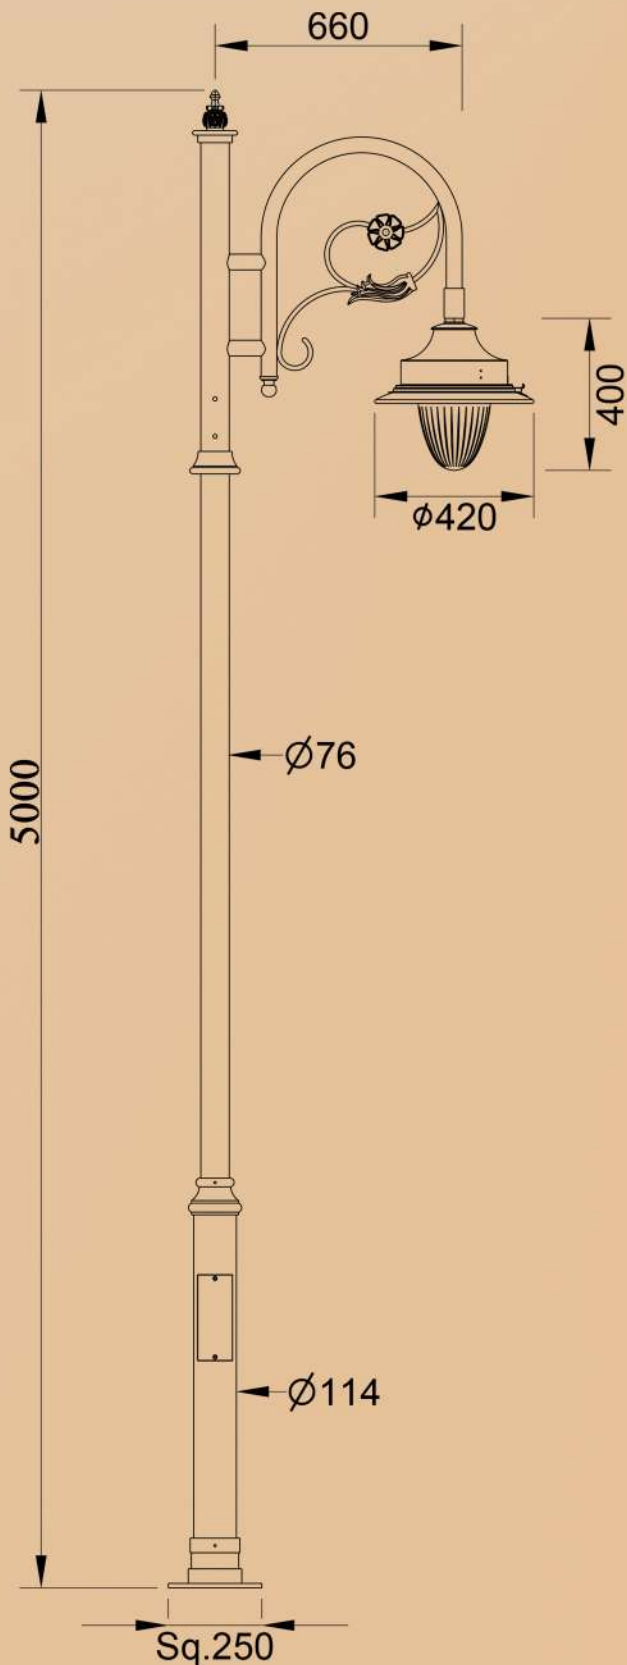

SPECIFICATIONS

- MILD STEEL POLE WITH CAST ALUMINIUM EMBELLISHMENTS
- BRACKET IS MADE OF MILD STEEL TUBE, CAST IRON & ALUMINIUM EMBELLISHMENTS
- CAST & SPUN ALUMINIUM LIGHTING FIXTURE WITH ACYRLIC DIFFUSER
- COATING SYSTEM
SHOT BLASTING & SANDING
PRE-TREATMENT , EPOXY PRIMER,
TOP COAT IN U.V. RAY RESISTANT
P.U. / POLYESTER PAINT
- HIGH POWER , HIGH EFFICIENCY LED CHIPS
- LED CHIPS ARE MOUNTED ON MC PCB WHICH IS DIRECTLY MOUNTED ON ALUMINIUM HEAT SINKS USING THERMAL PASTE FOR EFFECTIVE HEAT TRANSFER
- IP66 (OPTICAL AREA) PROTECTION WITH HIGH QUALITY SILICON RUBBER GASKET SEALING SYSTEM
- COMPLETE WITH LEDs AND DRIVER
PRE-WIRED UP TO TERMINAL BLOCK IN JUNCTION BOX

CATELOGUE NO.	LED WATTAGE (W)	RATED VOLTAGE (V)	MAINS CURRENT (A)
HL-ND-3461 (SINGLE ARM)5MTR	54W	230 V	<1A

